


BESTEK

150 Watts Power Inverter

Model: MRI1511LU

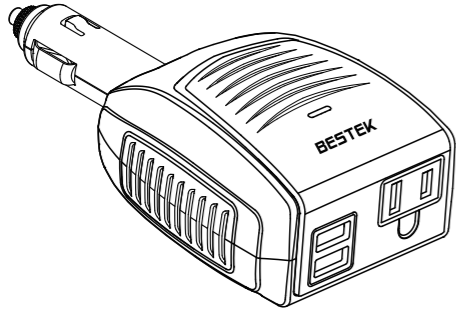

BESTEK Power Inverter

A must-have for your road trip

Ever wonder how to charge some kind of electronic gadget while in your motor-home, SUV or car? You might want to listen to your MP3 player or play a portable video game. These types of electronic devices can be recharged or powered by plugging them into your vehicle. But what if you want to use your laptop computer and other mobile devices at the same time? You need a power inverter.

Our solution, BESTEK 150W power inverter converts direct current (DC) into AC power. This inverter is ultra compact and lightweight, convenient with no additional wires or assembly required. Just directly plug in any 12V cigarette lighter socket.

Package Contents

- * BESTEK 150Watts Power Inverter
- * Welcome Guide


Features

- * DC to AC Power: provides 150 watts continuous DC to AC power and 300 watts peak output power to charge multiple electronic devices on the go
- * Fast Charging:with Smart IC technology, detects your device to deliver its fastest possible charge speed up to 2.4 amps per port or 4.2 amps through dual ports
- * Compact Design: convenient with no additional wires or assembly required. Directly plug in any 12V cigarette lighter socket
- * Advanced Protection: over-load and over-current protection. built-in cooling fan keep your appliance and car from overheating.

Technical Specifications

Input Voltage Range	DC11-15V
Continuous Output Watts	150W
Peak Output Capacity	300W
Rated Output USB	5V 4.2A
Output Wave Form	Modified Sine Wave
Over Voltage Shutdown	DC 15V-16V
Low Voltage Shutdown	DC 10V-10.5V

Identification of Parts



1. Smart Charging Port 2. AC Outlet

LED Indicator

No light from LED	Poor contact
Green	Power on and in operation
Red	Shutdown

Compatibility

Products	Watts	150 Watts
Digital camera,Cellphone Charger	10	✓
Portable DVD Player	25	✓
Sound System	60	✓
Laptop Computer 14-15 inch	60	✓
LCD/LED Display	30	✓
Video Game Console	140	✓
MacBook Pro	85	✓
Microwave Oven	1200	
Air Conditioner	1000	
Toaster	800	
Coffee Maker	600	

Note: Please check the wattage requirements of your devices prior to using.

Troubleshooting

Problem: AC product will not operate, no inverter lights are on

Possible Cause	Solution
Loose connections	Check connections

Problem: AC product will not operate, RED light ON

Possible Cause	Solution
AC product(s) connected are rated at more than the inverter's continuous power rating; overload shutdown has occurred	Use a product with a power rating less than the inverter's continuous power rating
The inverter has over heated	Unplug inverter from DC socket and allow to cool for 15 minutes. Remove objects covering unit. Move the inverter to a cooler place. Reduce load if continuous operation is required. Restart

Warranty

Our company provides customers with a warranty of 18 MONTHS from the date of purchase.

Contact Us

For any inquiries or comments concerning our products, please send an email to bestek.service@gmail.com, and we will respond to you as soon as possible. If there is any quality-related issue with the product, you may request a REPLACEMENT OR REFUND by submitting a request to us.