

Trouble Shooting:

LED status	Reasons	Resolutions
Solid green light	AC and USB outputs are in normal working condition	
Red light	Low voltage or over voltage of AC input, short circuit or overload of AC output	Plug out devices from AC outlets, restart the converter (in this case USB ports work)
No light	Converter has no power	Connect to wall socket
	The switch button is not turned on	Turn on the switch button
	The fuse is blown	Send for inspection or repair
	USB overload protection	Stop or reduce USB charging
	USB short circuit protection	Stop USB charging

Warranty:

Our company provides an 18-Month worry-free product guarantee for every purchase.


Contact Us:

If there is any quality-related issue or query about our product, please contact us via the Amazon buyer-seller message portal.

BESTEK

250W Travel Adapter & Power Converter
MODEL NO.: MRJ201GU


Thank you for purchasing our BESTEK travel adapter. For safety please read this manual before use.

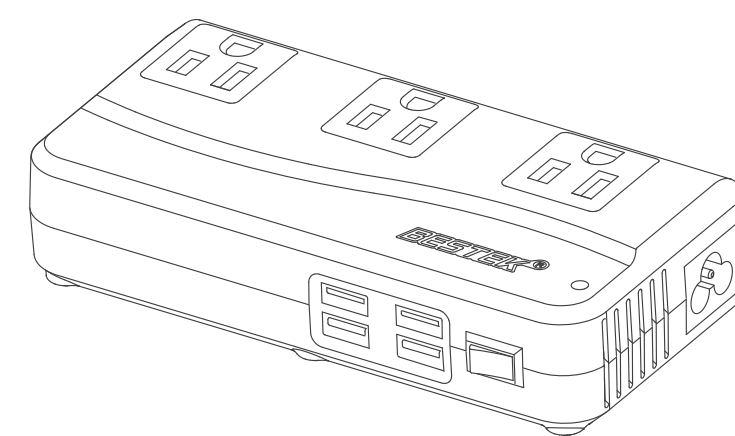

BESTEK GLOBAL LLC
1290 E ELM ST, #A-8, ONTARIO,
CA 91761
COMPANY: BESTEK
MADE IN CHINA

Product Description:

This product includes a cord with European plug and 3 universal plug adapters, has 3 AC outlets and 4 smart USB ports. The input voltage range is AC100V-240V, and any AC voltage between 100V-240V can be converted to 100-120V voltage, and the output frequency is 60HZ. This product is for customers in the United States to use small appliances and devices when travelling worldwide (users need to choose suitable universal plug adapters according to their travel destinations), supplies power and charges mobile office, communication and emergency equipment, compatible with various brands of mobile phones, laptops, and other digital electrical products rated at less than 250W.

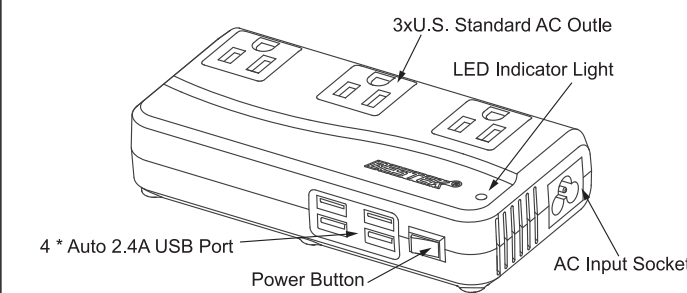

AC Input Socket:

- The USB ports are equipped with intelligent identification chip, can automatically identify all kinds of mobile phones and digital products, and configure charging current to provide the most efficient charge.
- The USB output is completely isolated from AC output to prevent your devices from being damaged.
- This product provides overheat, overload, overcurrent and short circuit protections to ensure user's safety.
- When overheat, overload, overcurrent or short circuit protections are activated, the power supply inside the converter needs to be restarted to reset. Follow these steps: disconnect AC output when the red light is on, switch to the position of "O" after the red light out and then switch to the position of the "I", insert devices to the AC outlets until the LED green light turns on.

- The AC outputs come with short circuit protection. When a short circuit occurs in your devices, the red light will turn on, and the output will be shut off to guarantee user's safety.
- The smart fan inside the converter increases or decreases its speed based on temperature and output power.

Warnings

- When simultaneously charging multiple devices, make sure the total wattage is less than 250W in case over-heating or damage.
- Please don't use this converter with appliances rated at voltage 220V-240V AC. This product is only able to supply power to 100V-120V AC products.
- Please don't use this power converter for supplying power to your hair dryer, curling iron, hair straightener or coffee machine.



How To Use:

- Connect the voltage converter and universal plug adapter with the cable, then plug it into the wall socket
- Turn on the power button.
- If the LED shows a solid green light, the converter will work normally, otherwise please turn see point 9 or contact customer service staff for help.

Specifications:

		Min.	Rated	Max.	Note
Output voltage	Vac	100	115	120	Vin: 180-240Vac
		90	115	120	Vin: 100-180Vac
Output frequency of resistive load	W	/	/	250	Vin: 180-240Vac
		/	/	200	Vin: 100-180Vac
Output frequency of capacitive load	W	/	/	250	Vin: 180-240Vac
		/	/	200	Vin: 100-180Vac
Output frequency	Hz	59	/	61	
USB Output		5V=4.2A (Auto 2.4A Max.Per Port)			